



Logstrup Complete Mounted Panels

Pls contact logstrup@unitconcept.com for more details and pricing

Logstrup

Logstrup Complete Mounted Panels



Logstrup is one of the leading panel builders in Denmark and wants to support our customers with all kind of customized panel solutions. With the customer in focus we cooperate with; Installers, Power Plants, OEM clients and Machine builders.

As part of the supply chain, we can help you by being a part of Complete projects in the engineering phase. We can control the total project from pre-engineering to production and test. All the panels are built in the Logstrup Panel System in either fixed, removable, withdrawable – or a combination.

The internal separation IP2x are according to IEC 61439 Form 1, 2a, 2b, 3a, 3b, 4a and 4b. Logstrup is independent of component suppliers and have the possibility co-operate with all internationally recognized component suppliers.

We ensure safe and secure distribution of electricity!

Distribution and MCC Panels



The Logstrup Distribution and MCC panels range from 63A up to 8500A with a short circuit level up to 130kA, 1 sec.

To secure the individual needs we can offer a wide range of knowledge from our project engineers, who can support our customers to find the best technical and economical solution for their application.

We ensure that the Logstrup panel system and the co-ordination of the components fulfills the requirement. All components are selected according to the given short circuit level and coordinated to the right Back-up level.

The distribution panels can be equipped with MCB, MCCB in fixed or plug-in and ACB's in fixed or draw-out version.

MCC can be equipped with motorstarters according to unit diagrams and with possibility of intelligent communication to the overall control system.

Motorstarters are available in fixed or in the Logstrup Omega withdrawable system.

As a part of our quality system all panels are tested according to our detailed test protocol.

Control Panels



Logstrup offers all kind of control and process panels for industrial use.

The Logstrup control panels can either be manufactured in the Logstrup modular system up to IP54 or in customized welded cabinets black steel or stainless steel up to IP65.

Together with recognized international system suppliers; Schneider Electric, ABB, Siemens and Rockwell we can offer a total automation solution with PLC, operator panel and communication interface to the overall control system.

All control panels are built according to international standards e.g. IEC 60204. Together with the control panels we can offer full documentation; arrangement drawings, part lists, wiring diagrams, programming, operation and maintenance instructions.

As a part of quality system all panels are tested according to our detailed test protocol.


Integrated Container Solutions



To reduce start up and commissioning on site we offer various integrated container/E-house solutions – what we call a “Plug and Play Solution” on site. The containers can be equipped with; Distribution panels, control panels, UPS system, air conditions etc.

Containers/E-houses are customized according to the customer's requirements; size, colour, insulation, doors, windows, floor, cable entry.

Serial Production

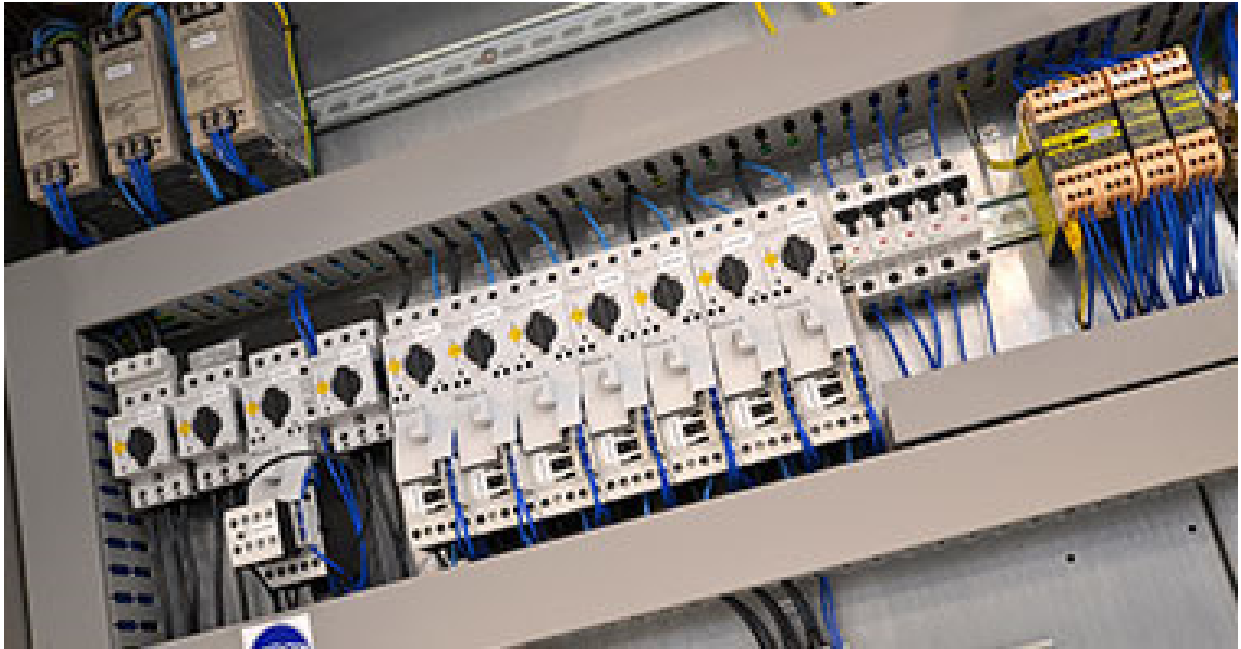

In close cooperation with some of our international customers we have developed professional and modern production lines for serial production.

To reduce cost for our clients and end users we work with pre-punched mounting plates and doors, pre-cut wires.

As a part of quality system all panels are tested according to our detailed test protocol.